

**LEHNER**  
**LIFTTECHNIK**



# DELTA

PLATFORM STAIRLIFT

# DELTA

The straight stairlift Delta is the perfect solution to make indoor and outdoor staircases accessible for wheelchair users. The designerlift fits perfectly into any environment.

## Reliability

Rigid platform mechanics and robust electronics provide for a low-maintenance performance and a high reliability of the platform functions, also in wet or cold conditions.

## Safety

Numerous safety mechanisms fulfill the highest technical standards - TÜV certified according to the European Norm EN 81-40.

## Comfort

Fully automatic platform functions and ergonomic controls allow a simple and comfortable control of the platform.

**Space miracle:** The lift requires only 300 mm from the wall when folded



Platform may be **coated in any RAL colour** to elegantly fit in any surrounding or bring some colour into grey spaces



**Robust platform mechanics** allow for installation in cold or wet environment

**HINT**

Have a look at the **user video** of our platform stairlifts



## Main advantages of the Delta stairlift


- Extremely slim and aesthetic design
- Installation on very narrow staircases
- Custom-made platform sizes are possible
- Available in all RAL colours and in stainless steel
- Available for indoor and outdoor installation
- Secure against vandalism thanks to solid platform construction
- Display with status indication on platform
- TÜV approved according to EN 81-40



**Low platform height** and a 90° access ramp allow for easy access at lower landings



**Landing controls** with elegant design can be used as handheld controls or fixed to the wall

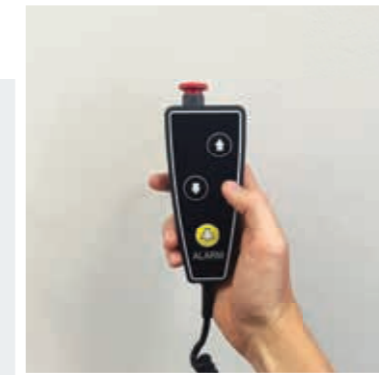

**Handset on spiral cable** on the platform allows for comfortable control of the lift while sitting on it




**Joystick on platform** as optional control function

## Delta – Technical specification

Loading capacity	225 kg (optional 300 kg)
Platform width (min-max)	600-900 mm
Platform length (min-max)	700-1300 mm
Gradient	0-52°
Speed	0.06-0.12 m/s
Noise level	Under 60 dB
Temperature	+45°C to -15°C
Minimum folded width	300 mm
Power supply	1 × 230 V / 50-60 Hz
Basic colour	RAL 9007 or 7035

Certificates  TÜV certified according to EN 81-40

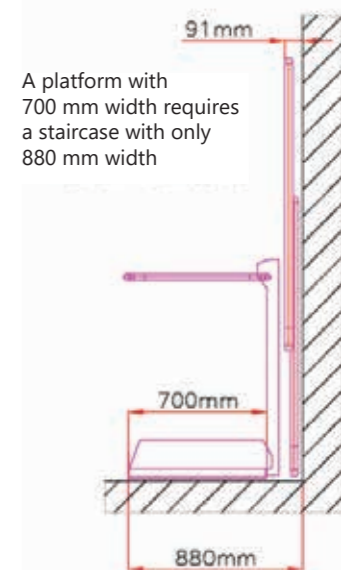



Platform stairlifts



Chair stairlifts



Vertical platformlifts



Stairclimbers



Poollift

Contact your dealer for  
further information:

Official partner of:

**LEHNER**  
LIFTTECHNIK

**Lehner Liftechnik GmbH**  
Salling 8  
4724 Neukirchen am Walde  
Austria  
+43 7278 35 14  
sales@lehnerliftechnik.at  
www.lehner-liftechnik.at

Visit our website  
for more details  
about this lift

