

**LEHNER**  
**LIFTTECHNIK**



# STRATOS

PLATFORM STAIRLIFT

# STRATOS

The user friendly platform stairlift for straight and curved staircases convinces with its fast and easy mounting. The Stratos is the perfect solution both for indoor and outdoor installation.

## Reliability

Rigid platform mechanics and robust electronics provide for a low-maintenance performance and a high reliability of the platform functions, also in wet or cold conditions.

## Safety

Numerous safety mechanisms fulfill the highest technical standards - TÜV certified according to the European Norm EN 81-40.

## Comfort

Fully automatic platform functions and ergonomic controls allow a simple and comfortable control of the platform.

**Stainless steel rails and platform**  
as optional choice for a luxury appearance



A **strong and stable platform** allows easy and safe access at the landings



Platform may be **coated in any RAL colour** to elegantly fit in any surrounding or bring some colour into grey spaces

**HINT**

Have a look at the **user video** of our platform stairlifts



## Main advantages of the Stratos stairlift


- Slim and aesthetic design
- Custom-made platform sizes are possible
- Available in all RAL colours and in stainless steel
- Available for indoor and outdoor installation
- Secure against vandalism thanks to solid platform construction
- Display with status indication on platform
- TÜV approved according to EN 81-40



**Compact lift design** that fits smoothly into any environment



**Landing controls** with elegant design can be used as handheld controls or fixed to the wall

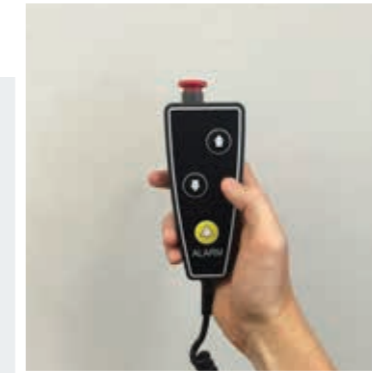


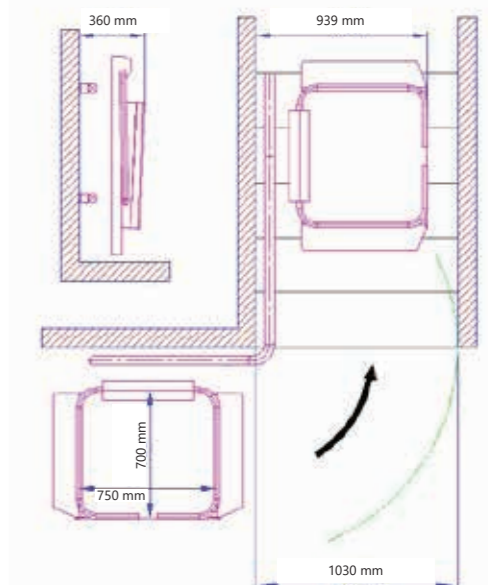
**Handset on spiral cable** on the platform allows for comfortable control of the lift while sitting on it



**Joystick on platform** as optional control function

## Stratos – Technical specification

Loading capacity	225 kg (optional 300 kg)
Platform width (min-max)	600-900 mm
Platform length (min-max)	700-1300 mm
Gradient	0-47°
Speed	0.06-0.1 m/s
Noise level	Under 60 dB
Temperature	+45°C to -15°C
Minimum folded width	360 mm
Power supply	1 × 230 V / 50-60 Hz
Basic colour	RAL 9007 or 7035
Certificates	 TÜV certified according to EN 81-40





Platform stairlifts



Chair stairlifts




Vertical platformlifts



Stairclimbers



Poollift

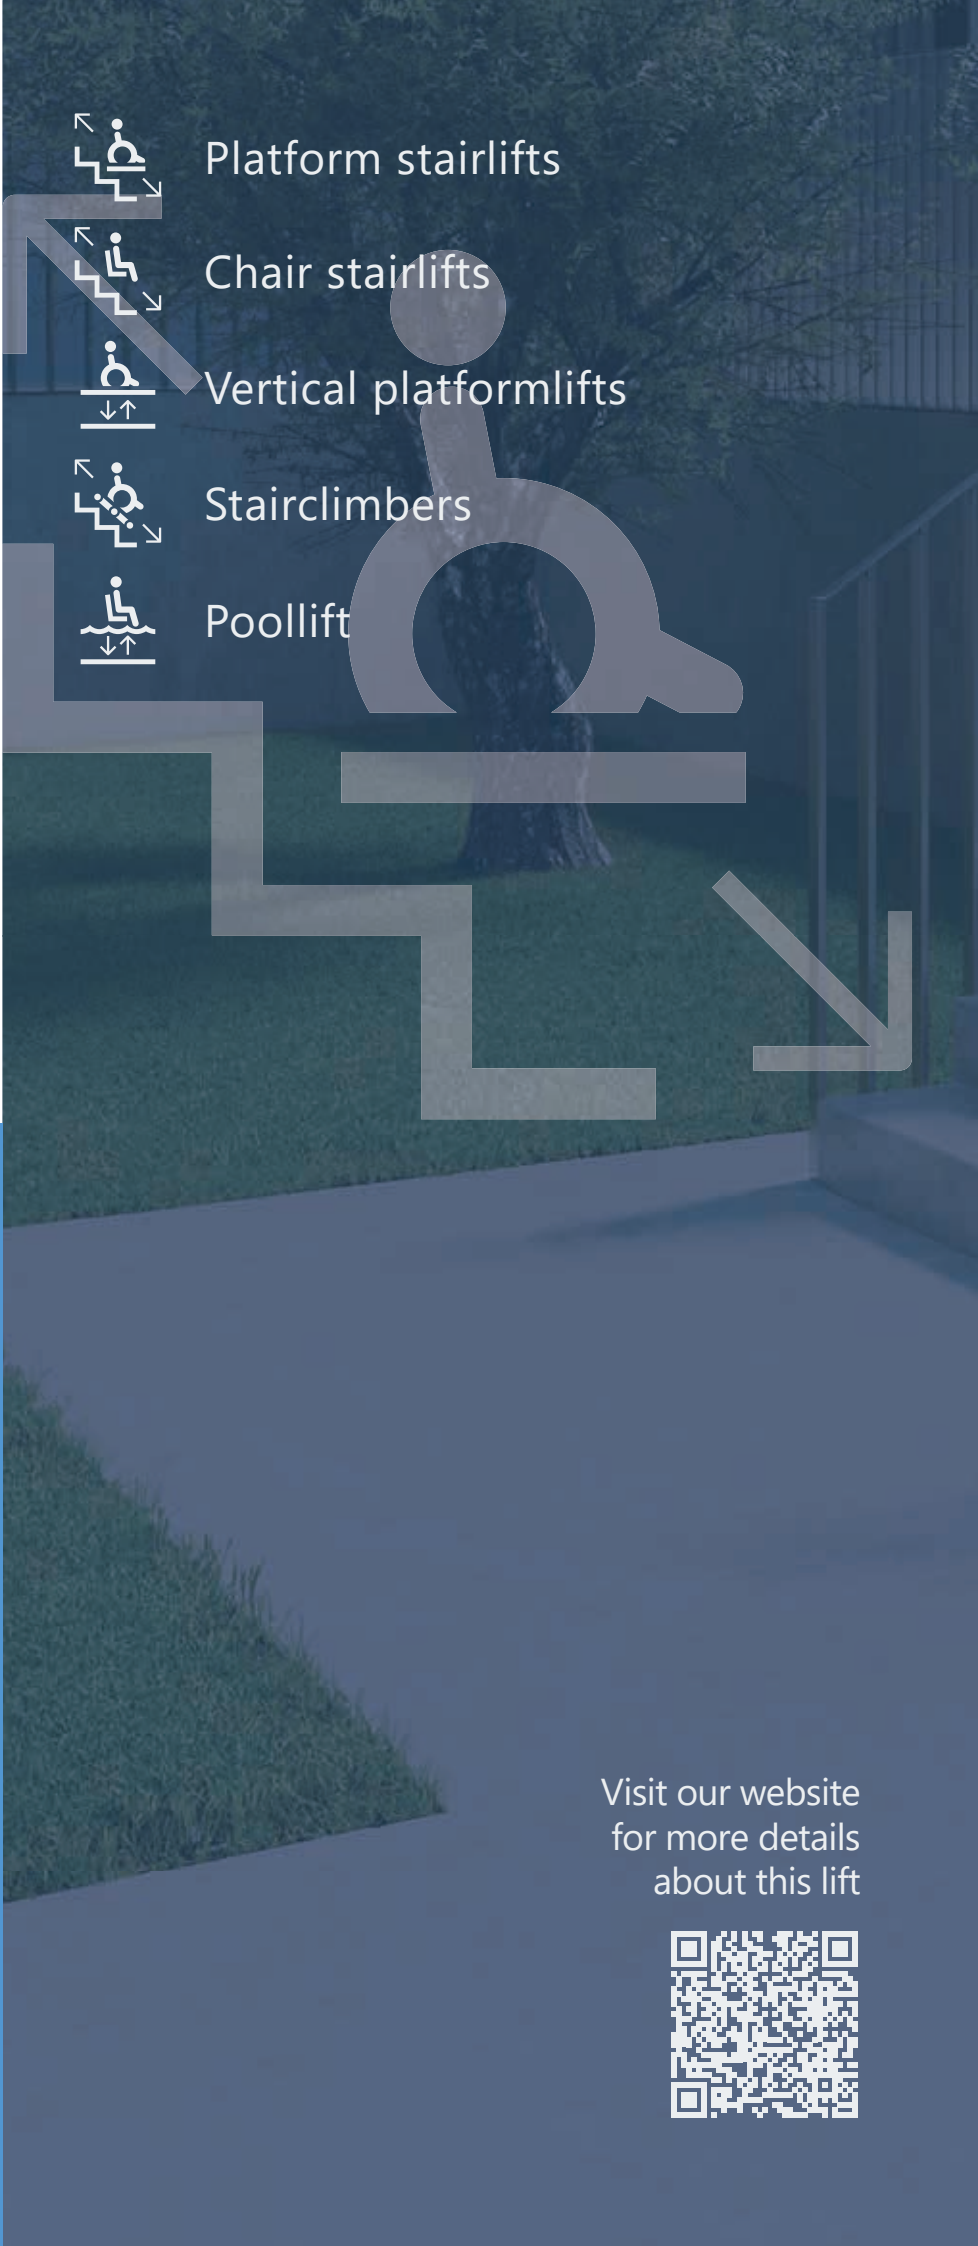

Contact your dealer for further information:



Official partner of:



**Lehner Liftechnik GmbH**

Salling 8  
4724 Neukirchen am Walde  
Austria  
+43 7278 35 14  
sales@lehnerlifttechnik.at  
www.lehner-liftechnik.at

Visit our website for more details about this lift

